

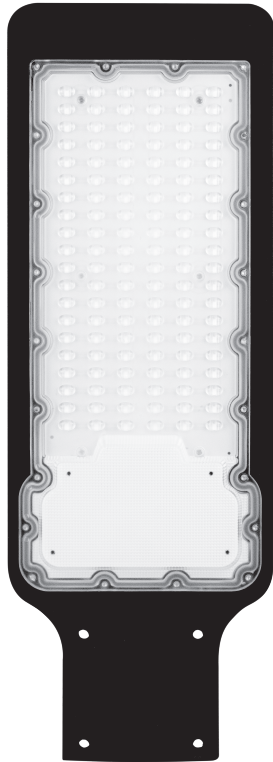


# LED STREET LIGHT

## INSTALLATION & OPERATION INSTRUCTIONS



★ ★ ★ Note: When installing the lamp, after the input line is firmly connected, it needs to be tightly wrapped with insulating tape for 2 layers.




### ATTENTION :

1. Please handle the glass parts carefully during transport.
2. Do not disassemble the lights unless you are a professional.
3. The working power is high-voltage alternating current. Ensure it is installed out of reach, with no exposed wire cores, and properly grounded.
4. The installation site must have sufficient load-bearing capacity to ensure safety.
5. Do not touch the light cup by hand while it is working to avoid burns.
6. The working ambient temperature should be below 45°C. Exceeding this may affect the product's lifespan. Maintain proper conditions.
7. Do not operate outside the voltage range to ensure the lifespan of the ballast.
8. This product is tri-proof and can operate in the rain, but it should not be submerged in water.
9. Clean the dust periodically to maintain good heat dissipation. Avoid using corrosive liquids for cleaning.
10. Professional installation and maintenance are recommended.
11. It is normal for mist to appear inside the product's surface.
12. Ensure proper waterproof treatment of the exposed three-core wire. Failure to do so can cause water ingress and lead to lamp failure.

### INSTALLATION

1. Open the box, check if each necessary spare parts available.
2. According to the diameter of the lamp-arm to adjust the lamp to suitable place. Connect cables. The blue cable is Null Line, Brown cable is Live Line, Yellow-Green cable is Earth Line. Input cables into the lamp-post, and install lamp to the arm.
3. Lock the lamp with screws tightly.
4. Make sure the input AC voltage meet the lamp's range. Check all ready, connect to power, lamp is on.
5. Installed by experts.



- ★ Tips: When installing high-power luminaires, the total power of all luminaires controlled by a single switch must not exceed the load limit of the switch. The installation quantity restrictions are as follows:
- Luminaires rated at 100W or below should not exceed 20 units.
  - Luminaires rated between 150W and 200W should not exceed 15 units.
  - Luminaires rated between 300W and 500W should not exceed 5 units.

★ 大功率灯具安装时，同一个开关控制的线路中，灯具功率的总和不能超过开关的负载上限，安装数量限制约为：  
100W及100W以下的灯具不能超过20个  
150-200W的灯具不能超过15个  
300-500W的灯具不能超过5个